
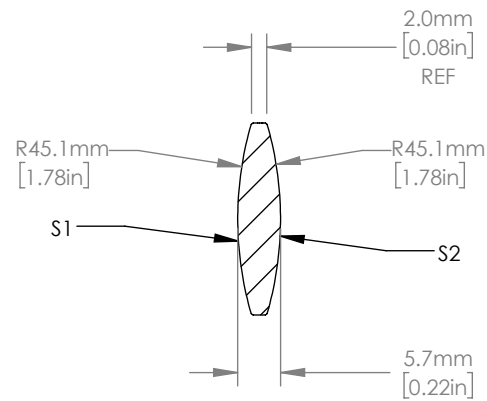


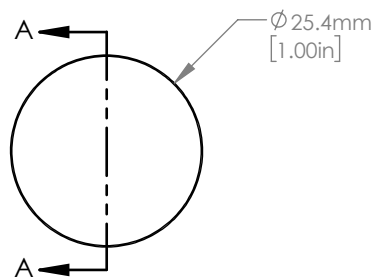

SECTION A-A

NOTES/SPECIFICATIONS:

1. DESIGN WAVELENGTH: 587.6 nm
2. FOCAL LENGTH: $f=50.2 \text{ mm} \pm 1\%$
3. BACK FOCAL LENGTH(REF): $bf=48.2 \text{ mm}$
4. CLEAR APERTURE: $> \text{Ø } 22.86 \text{ mm}$
5. SURFACE QUALITY: 20-10 SCRATCH-DIG
6. CENTRATION: $\leq 3 \text{ arcmin}$
7. DIAMETER TOLERANCE: $+0.0/-0.1 \text{ mm}$
8. THICKNESS TOLERANCE: $\pm 0.1 \text{ mm}$
9. SURFACE IRREGULARITY: $\leq \lambda/4$, @633 nm
10. SPHERICAL SURFACE POWER: $\leq 3\lambda/2$, @633 nm
11. COATING(S1,S2): VAR R<0.25% PER SURFACE FOR 532 nm & 1064 nm, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION				 睿创光科 RCOPTICS			
	NAME	DATE	F=50.0mm, D25.4 UVFS Bi-Convex Lens, YAG coating				
DRAWN	CWD	2022/5/18	EX4254-50-YAG				
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			UV FUSED SILICA	0.0043kg	1:1	A	