


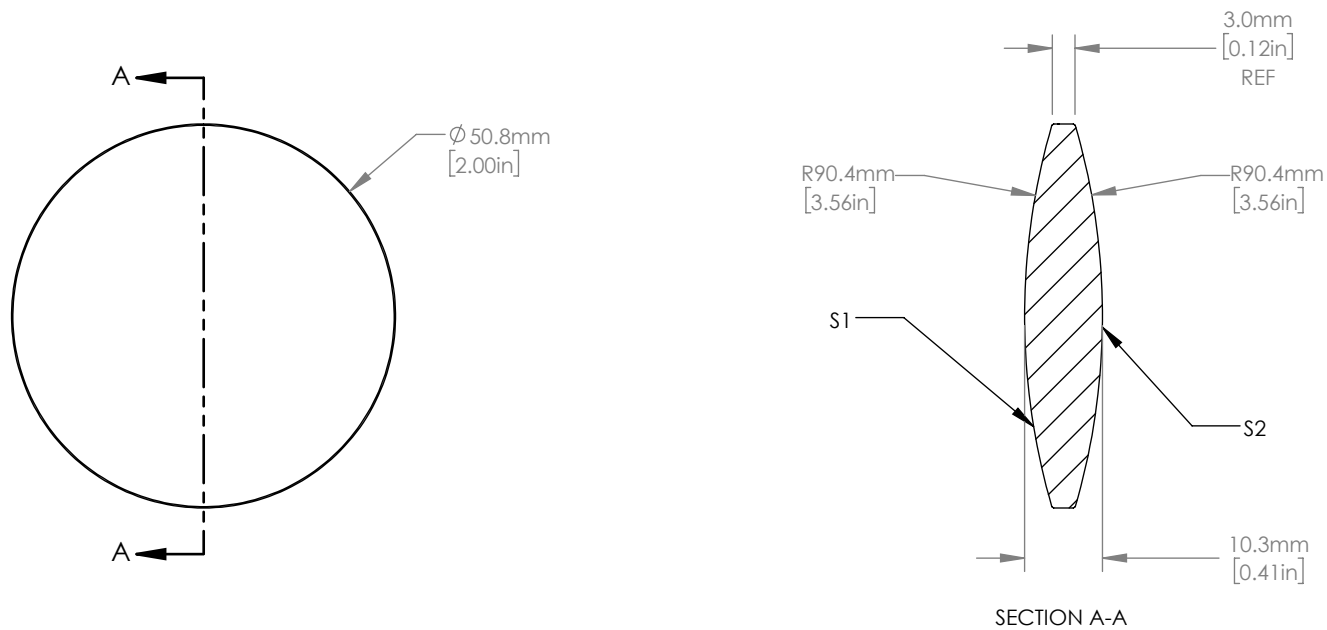

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6 nm
- FOCAL LENGTH: $f=100.3\text{ mm} \pm 1\%$
- BACK FOCAL LENGTH(REF): $bf=96.8\text{ mm}$
- CLEAR APERTURE: $> \Phi 45.72\text{ mm}$
- SURFACE QUALITY: 20-10 SCRATCH-DIG
- CENTRATION: $\leq 3\text{ arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1\text{ mm}$
- THICKNESS TOLERANCE: $\pm 0.1\text{ mm}$
- SURFACE IRREGULARITY: $\leq \lambda/4$, @633 nm
- SPHERICAL SURFACE POWER: $\leq 3\lambda/2$, @633 nm
- COATING(S1,S2): VAR R<0.25% PER SURFACE FOR 1550 nm, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			睿创光科 RCOPTICS			
	NAME	DATE	F=100.0mm, D50.8UVFS Bi-Convex Lens, 1550nm coating			
DRAWN	CWD	2022/5/18	EX4508-100-1550			
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			UV FUSED SILICA	0.0298kg	1:1	A