
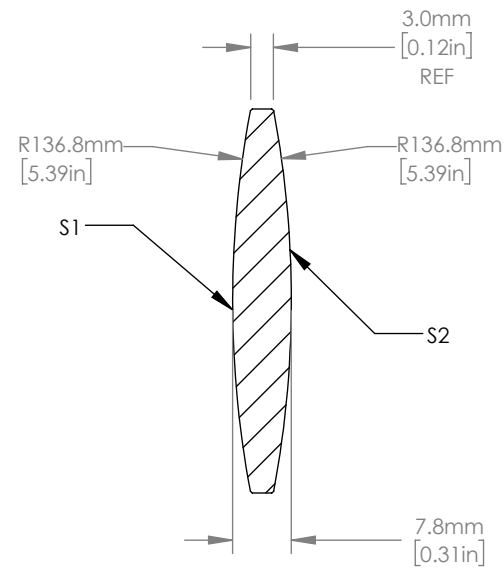


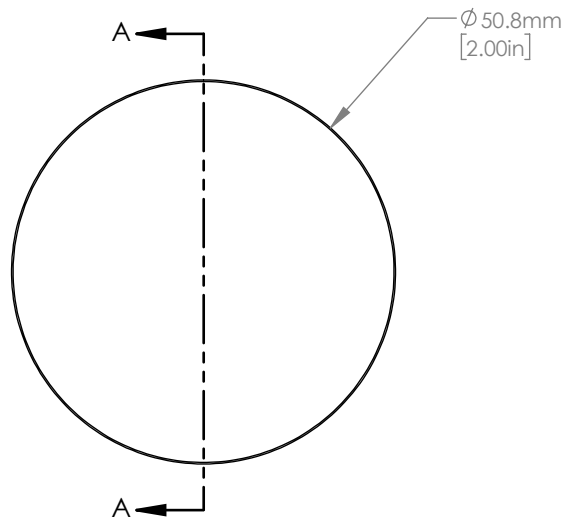

SECTION A-A

NOTES/SPECIFICATIONS:

- DESIGN WAVELENGTH: 587.6 nm
- FOCAL LENGTH: $f=150.5\text{ mm} \pm 1\%$
- BACK FOCAL LENGTH(REF): $bf=147.8\text{ mm}$
- CLEAR APERTURE: $> \phi 45.72\text{ mm}$
- SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: $\leq 3\text{ arcmin}$
- DIAMETER TOLERANCE: $+0.0/-0.1\text{ mm}$
- THICKNESS TOLERANCE: $\pm 0.1\text{ mm}$
- COATING(S1,S2): BBAR $R_{avg} < 0.5\%$ FROM 650-1050 nm, 0° AOI

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			睿创光科 RCOPTICS			
	NAME	DATE	F= 150.0 mm, D50.8mm Fused Silica Bi-Convex Lens, B Coateding			
DRAWN	CWD	2022/5/18	EX4508-150-B			
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES			UV FUSED SILICA	0.02404kg	1:1	A