

	ITEM	MATERIAL		
1)	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM		
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA		



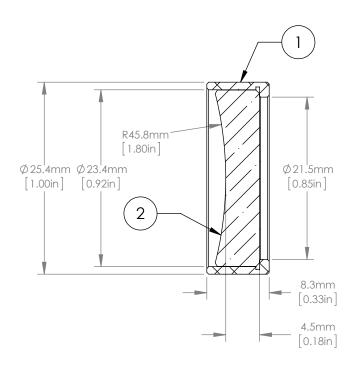

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.
- FOCAL LENGTH: -100.0mm ±1% WORKING DISTANCE: -96.1mm DESIGN WAVELENGTH: 587.6nm CLEAR APERTURE: >21.0mm SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: ≤ 3arcmin COATING: BBAR 650-1050nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		○ 睿创光科 RCOPTICS					
	NAME	DATE	D25.4 F= -100 Mounted Rd UVFS B Coated Plano-Concave Cyl Lens				
DRAWN	CWD	2022/5/18	PCY4254RM100-B				
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.006kg		A		