



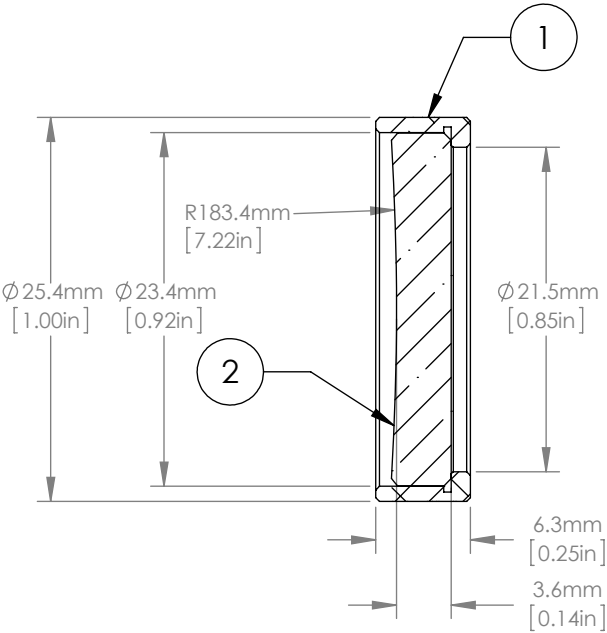

|   | ITEM                         | MATERIAL         |
|---|------------------------------|------------------|
| ① | BLACK ANODIZED MOUNTING RING | 6061-T6 ALUMINUM |
| ② | ROUND CYLINDRICAL LENS       | UV FUSED SILICA  |

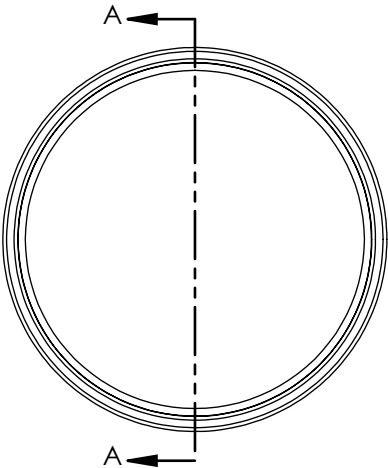

NOTES/SPECIFICATIONS:

1. FOCAL LENGTH: -400.0mm ±1%
2. WORKING DISTANCE: -397.5mm
3. DESIGN WAVELENGTH: 587.6nm
4. CLEAR APERTURE: >21.0mm
5. SURFACE QUALITY: 40-20 SCRATCH-DIG
6. CENTRATION: ≤ 3arcmin
7. COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY  
NOT FOR MANUFACTURING PURPOSES

|  |      |           |   |         |       |     |
|--|------|-----------|---|---------|-------|-----|
| DRAWING PROJECTION                                 |      |           |   |         |       |     |
|  | NAME | DATE      | D25.4 F= -400 Mounted Rd UVFS A Coated Plano-Concave Cyl Lens   |         |       |     |
| DRAWN  | CWD  | 2022/5/18 | PCY4254RM--400-A  |         |       |     |
| APPROVAL   | ZSB  | 2022/5/18 | MATERIAL  | WEIGHT  | SCALE | REV |
| FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES |      |           | SEE TABLE   | 0.004kg |       | B   |