

	ITEM	MATERIAL		
1)	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM		
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA		



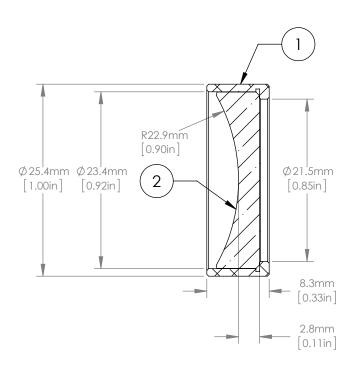

NOTES/SPECIFICATIONS:

- 1. 2. 3. 4. 5. 6. 7.

- FOCAL LENGTH: -50.0mm ±1% WORKING DISTANCE: -44.9mm DESIGN WAVELENGTH: 587.6nm CLEAR APERTURE: >21.0mm SURFACE QUALITY: 40-20 SCRATCH-DIG CENTRATION: ≤ 3crcmin COATING: BBAR 350-700nm, Ravg < 0.5%, 0° AOI

FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION			客创光科 RCOPTICS					
	NAME	DATE	D25.4 F= -50 Mounted Rd UVFS A Coated Plano-Concave Cyl Lens					
DRAWN	CWD	2022/5/18	PCY4254RM50-A					
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV		
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.004kg		В			