
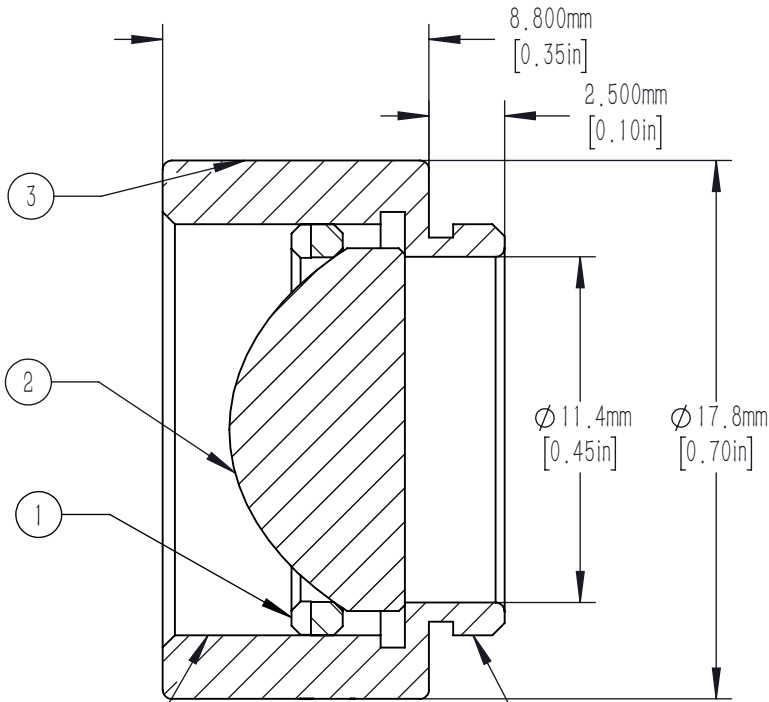


	PART DESCRIPTION	MATERIAL
①	SM05RR	ANODIZED ALUMINUM
②	ACL012-10.5-B	B270
③	SM05L8-A	ANODIZED ALUMINUM

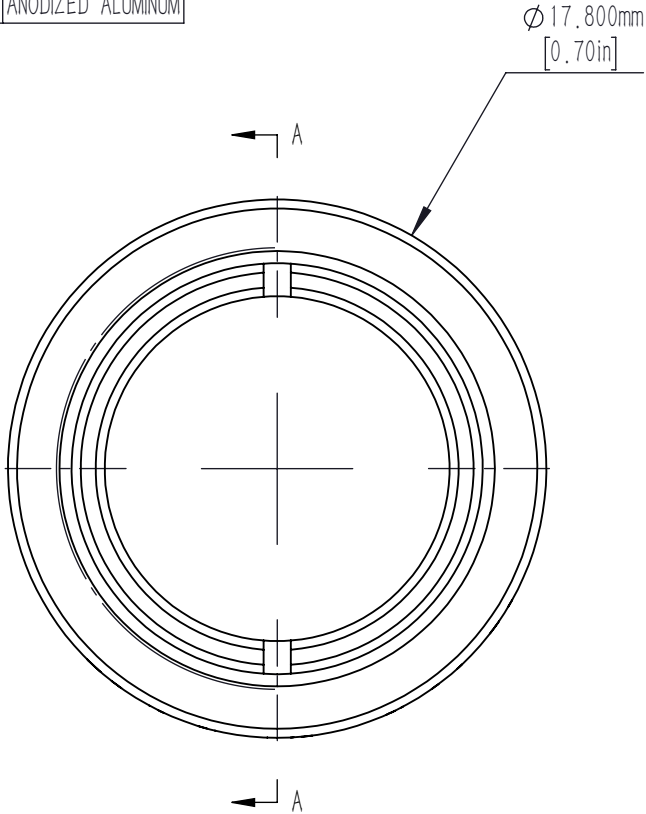

- NOTES/SPECIFICATIONS:
1. WORKING WAVELENGTH: 650nm-1100nm
 2. FOCAL LENGTH: f=10.5mm±8%
 3. NUMERICAL APERTURE: 0.54
 4. CLEAR APERTURE 90% Of Diameter
 5. SURFACE QUALITY: 80/50
 6. COATING: Ravg<0.5%@650-1100nm

SM05(Φ 0.535-40) SERIES INTERNAL THREAD

SM05(Φ 0.535-40) SERIES EXTERNAL THREAD

FOR INFORMATION ONLY NOT FOR
MANUFACTURING PURPOSES

DRAWING PROJECTION			 			
	NAME	DATE	Mounted D12mm, F=10mm, NA=0.54, Aspheric Condenser Lens, B Coated			
DRAWN	CWD	2022/5/18	ACL012-10.5-B-ML			
APPROVAL	ZSE	2022/5/18	MATERIAL	WEIGHT	SCALE	REV
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES			N/A	0.004kg	4:1	A