

	ITEM	MATERIAL	
1	BLACK ANODIZED MOUNTING RING	6061-T6 ALUMINUM	
2	ROUND CYLINDRICAL LENS	UV FUSED SILICA	



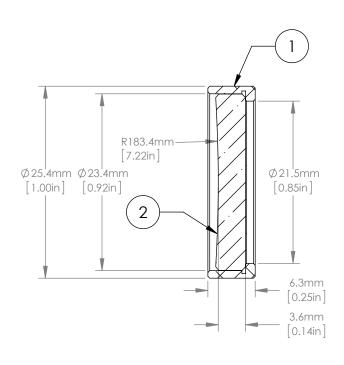

## NOTES/SPECIFICATIONS:

- FOCAL LENGTH: -400.0mm ±1% WORKING DISTANCE: -397.5mm DESIGN WAVELENGTH: 587.6nm CLEAR APERTURE: >21.0mm SURFACE QUALITY: 40-20 SCRATCH-DIG
- CENTRATION: ≤ 3arcmin COATING: BBAR 650-1050nm, Ravg < 0.5%, 0° AOI

## FOR INFORMATION ONLY NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		] 🗇	<b>容</b> 创光科 RCOPTICS				
	NAME	DATE	D25.4 F= -400 Mounted Rd UVFS B Coated Plano-Concave Cyl Lens				
DRAWN	CWD	2022/5/18	PCY4254RM400-B				
APPROVAL	ZSB	2022/5/18	MATERIAL	WEIGHT	SCALE	REV	
FOR INFORMATION ONLYNOT FOR MANUFACTURING PURPOSES		SEE TABLE	0.004kg		A		